


ergoselect 200 – Technical Specifications

Dimensions

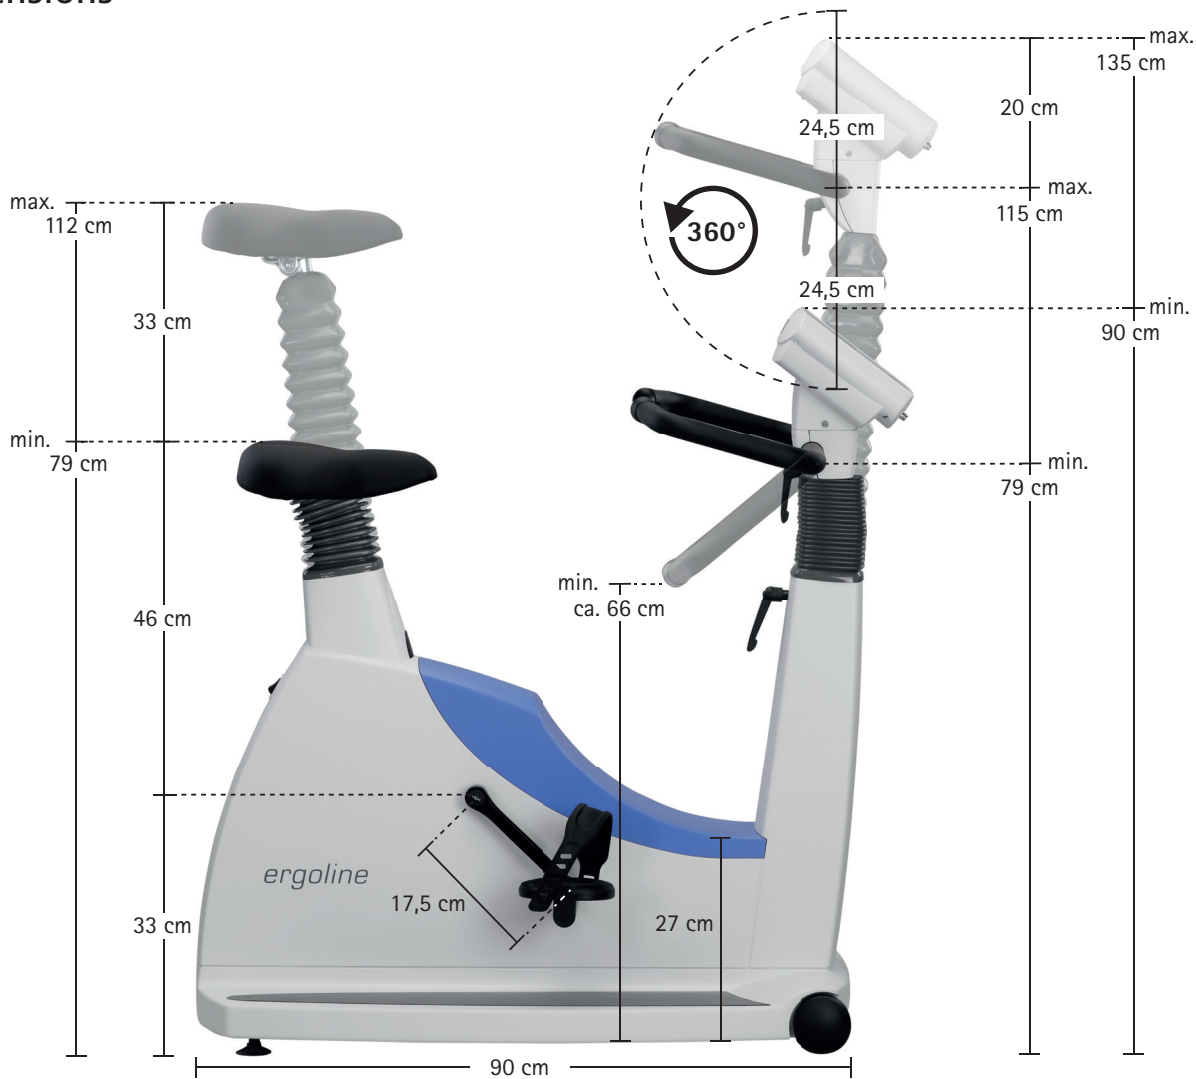

ergoselect 200 – Technical Specifications

Ergometer		ergoselect 200
Brake system		microprocessor controlled eddy current brake
Load		6 – 999 Watt, speed independent
Accuracy		according to DIN VDE 0750-238
Speed range		30 – 130 rpm
Handlebar adjustment		inclination: 360° / height: 90 – 126 cm
Saddle height adjustment		continuous, motor-driven
Patient height		approx. 120 cm – 210 cm
Patient weight (max.)		160 kg / 200 kg with anti-tip protection plate (option)
Control panel		
Display / patient display		load, rpm, speed, time, blood pressure, spo2 (option), heart rate (LCD) / rpm (LED)
Keyboard		membrane keyboard
Graphic display (load, heart rate)		○ (type K)
Exercise protocols		
User programmable		10
Fixed incremental protocols (WHO, Hollmann, etc.)		5
Manual load control		●
Training protocols		
Pulse-controlled training (integrated HR receiver)		○ (type K)
Predefined performance tests		○ (type K)
Options		
Automatic blood pressure measurement		○
Oxygen saturation measurement		○ (type K)
Pediatric ergometry / diagnostic tests for athletes		○
Interfaces		
Digital (RS-232, USB) / analog / remote start		● / ○ / ○
Dimensions and Weight		
Ergometer		Ergometer with packaging
Length: 90 cm		Length: 107 cm
Width: 46 cm (Width handlebar approx. 53,5 cm)		Width: 60 cm
High: 90 – 139 cm		High: 146 cm
Weight: approx. 67 kg		Weight: approx. 84 kg
Miscellaneous		
Power		100 – 240 V / 50 – 60 Hz / 100 VA max.

● Standard ○ Option