LITEBOX

3-channel NCS, EMG and EP system



- 3 acquisition channels for quickest examination ever
- NCS and needle EMG according to international standards
- All-in-one: stimulators, amplifier, keyboard in single compact and lightweight box
- Electrical stimulator with unipolar and bipolar pulse waveforms
 - Premium signal quality due to innovative circuits for sophisticated filtering, noise suppression and stimulus artifact reduction

EVERYTHING POSSIBLE IN EMG IS EASY WITH LITEBOX!

For more than a quarter of a century, Neurosoft has been designing and developing medical devices for neurophysiology and electrodiagnostics. And all this time we have been committed to improve our products for making your routine work not only effective but as quick and comfortable.

Today we offer not just another EMG and EP system, but a **comprehensive device to meet** the needs of the most demanding users. If high performance, effectiveness, ergonomics, usability and time-saving is what you strive for, Litebox is the superb solution for you!



- Somatosensory evoked potentials (SEP)

- (IONM)
- ERG)³

if magnetic stimulator is available if corresponding equipment is available

STILL WIDER HORIZONS

Nerve conduction study (NCS) motor and sensory conduction velocity, F-wave, H-reflex (also including paired stimulation), motor and sensory inching

Electromyography (EMG) spontaneous activity, interference curve, motor unit potentials (MUP), macro-EMG, **QEMG** (NEW)

Neuromuscular junction repetitive stimulation, jitter

Motor unit number estimation (MUNE) including MUNIX and CMAP SCAN

Additional EMG techniques blink reflex, sacral reflex, bulbocavernosus reflex, T-reflex¹, galvanic skin response, tremor, **RIII** (NEW)

Flash and pattern-reversal visual evoked potentials (VEP)

Auditory evoked potentials (AEP)

Vestibular evoked myogenic potentials (VEMP)

Cognitive evoked potentials (P300, MMN, CNV, MRCP, N400, P50^(NEW))

Transcranial magnetic stimulation (TMS)²

Intraoperative neurophysiological monitoring

Heart rate variability (HRV)³

Electroretinography (ERG, including multifocal



OPPORTUNITIES IN A COMPACT FORM



Bipolar stimulus waveform for next level of artifact reduction!

Two software switchable stimulator outputs for two stimulating electrodes.





All what you need for evoked potential acquisition: built-in auditory-visual stimulators with outputs to connect pattern monitor, LED goggles for VEP and headphones for AEP. Auditory stimulator features click and tone pulse waveforms.





Three acquisition channels for **really quick** NCS, EMG and EP studies.



Dedicated keyboard for easy control over the examination through quick access to the main actions without computer keyboard and mouse assistance. The keys for stimulus amplitude adjustment, stimulation start, single pulse delivery, impedance measurement, etc. are always at your fingertips.



Smooth, quick and simple as one, two, three: record motor response using the first channel, sensory response using the second channel and needle EMG using the third channel. No more cable reconnection, let them serve much longer!











Reliable ring electrodes

.

•••

1


2




Several types of **stimulating electrodes**. Simply choose what is the most convenient for you from the best of the kind:

- adjustable electro stimulating probe featuring built-in stimulation controls and rotation mechanism for changing the angle of the steel stimulation tips and distance between them;
- stimulating bar electrode (adult and pediatric);
- stimulation electrode with steel stimulation points (adult and pediatric);
- built-in stimulation controls (including programmable buttons).



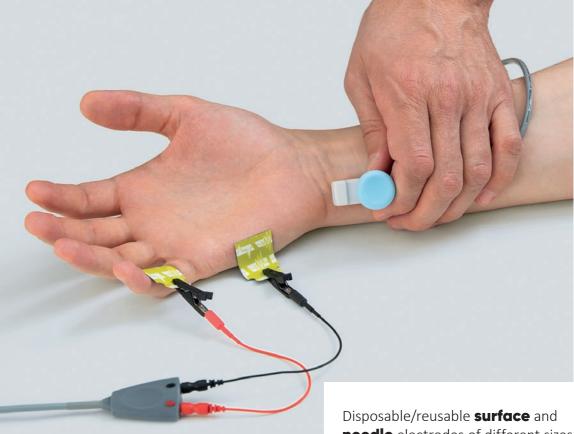





Apart from control keys on the device panel the stimulation control is also possible with the **footswitch**. You can assign the desired function to the pedal and change it when necessary.

needle electrodes of different sizes.



NCS

The software features dozens of default templates for the nerve conduction studies: motor and sensory conduction velocity measurement for all nerves accessible for stimulation, F-wave, H-reflex, motor, and sensory inching, etc. That is how all well-known and rare NCS techniques become possible. Thanks to the different useful software options (help window, linked tests, hotkeys, and others) the examination promises to be even more comfortable and less timeconsuming.

Needle EMG

•••••••••••••••

Acquisition and analysis of spontaneous EMG activity, interference pattern and MUP is done in one window.

During spontaneous activity analysis, algorithms of automatic phenomena classification can be applied. While MUP recording, the software automatically detects MUPs and selects those that may be related to one and the same motor unit. When studying interference pattern, the software displays turn/amplitude data cloud in real-time. It allows fine adjusting the muscle contraction and performing this test most properly. On EMG study completion, all main results are shown in one window.

Evoked potentials

••••••••••••

For premium-quality EP acquisition Litebox is equipped with highly sensitive and noise-immune amplifiers with very wide bandwidth. Specific stimulation and averaging algorithms ensure good-quality traces at a minimum number of averagings.

X X	less time if o to the conve test ⁴	
	10 10 20 126.6** 304 505 1 304 505 1 304 505 1 304 500 1 304 500 1 305 500 1 304 500 1 305 500 1 306 500 1 306 500 1 306 500 1 306 500 1 306 500 1 306 500 1 300 500 1 300 500 1 300 500 1 300 500	
	2 Seet percel + stimulus Hensity 200 253 4 200 253 4 200 253 4 200 254 255 255 255 256 257 257 257 257 257 257 257 257	

TMS

Magnetic stimulation stands out from


the other electromyographic techniques. TMS provides valuable information on the descending efferent pathway status. It allows estimating cortical excitability, measuring conduction velocity in the pyramidal tract, motor pathways and motor nerve roots of the spinal cord. Neuro-MEP.NET software has a wide list of preset TMS test templates with pre-defined automated stimulation sequences, automatic calculation of numerical results and many other pleasant surprises for users who got used to conventional TMS-EMG tests.

NCS

Measuring motor conduction velocity in 5 quick steps:




less than 3.5 minutes for one nerve!

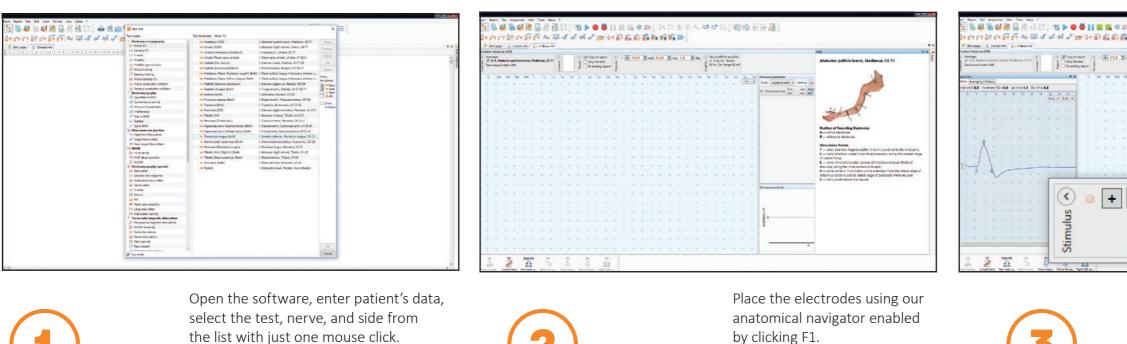

30 seconds

Do the same for next stimulation points, measure the distances between the recording and stimulation sites and enter them in the input box using PC keyboard or knobs (!) on the Litebox.

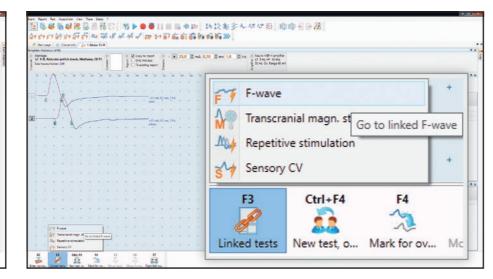

1 minute

Hotkeys on the device panel or in the software allow switching to the next test or linked tests: sensory CV, F-wave, etc.

20 seconds



20 seconds

* 株読素変んはび招」1000日日島。 1914時第320	
mA (9,20) [2] mg (1.6) [2] Hz	
en 1 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1/2 1	+x
23,0 🖨 mA 0,20 🖨 ms 1,0	thz €

Set stimulus amplitude, deliver the stimuli and change their intensity on-the-fly by rotating the knob on the keyboard and then record the response.

1 minute

Patent, . Baan date 3 mg	Neurosoft company Exam report	Anvo-tigh 4 angular
Mater CV		
Anderer V R. Addester police brevis Medianus (217)	All at all an an and a bar a	
1	An and Anticipal International Parts	
any langelitude bater.	Allowing	
In have have have been by	W.	
23 900 100		

After the examination is finished the software automatically generates the report. It can be edited, saved or printed.

EMG PRODUCT LINE

	Number of EMG/ EP channels	Number of electrical stimulation channels	Included techniques	Configuration
Litebox	3	1	EMG	
Neuro-MEP-Micro	2	1	EMG	All-in-one, connection to PC and power supply via USB cable
Skybox	5	2	EMG, EP	
Neuro-MEP-4	4	1/2	EMG, EP	Modular architecture: all units conveniently arranged at workplace are connected via USB and make optimal configuration of your own
Neuro-MEP-8	8	1/2	EMG, EP	



www.neurosoft.com, info@neurosoft.com Phones: +7 4932 95-99-99 5, Voronin str., Ivanovo, 153032, Russia